

NetWaySP1A

Media Converter/Repeater



Altronix NetWaySP1A PoE powered media converter/repeater converts a Gigabit (1000Mbps) Ethernet to Fiber (1000Base-X/SX/LX).



NetWaySP1A

Specifications

Input	PoE IEEE 802.3AF compliant, Power: 2W
Fiber Ports:	One (1) 1Gb SFP port
Ethernet:	One (1) Gigabit (1000Mbps) port
Indicators (LED)	
Yellow and Green LED:	IP Link status, 10/100/1000 Base-T/active
Green LEDs	Port status
Agency Listings	
UL/cUL	UL60950-1 (Information Technology Equipment)
CE	European Conformity

Physical and Environmental

Dimensions (W x L x H)

Enclosure: 2.5" x 3.8" x 1" (63.5mm x 96.5mm x 25.4mm)

Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)

Weight (approx.)

Product: 0.15 lb. (0.07 kg)

Shipping: 0.25 lb. (0.11 kg)

Temperature


Operating: - 40°C to 70°C (- 40°F to 158°F)

Storage: - 40°C to 70°C (- 40°F to 158°F)

Relative Humidity 85% +/- 5%

Operating Altitude - 304.8 to 2,000m

Typical Application

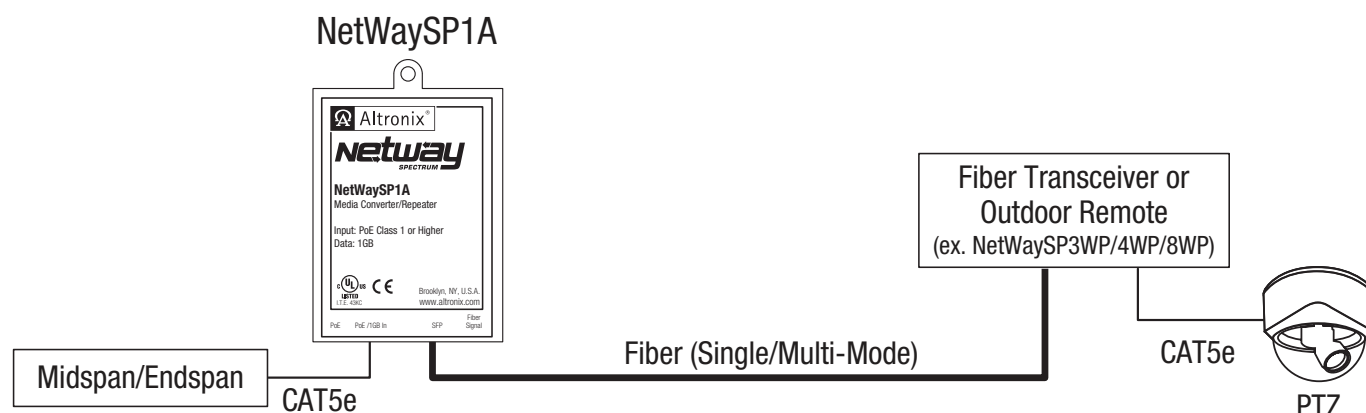


Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Accessories (order separately)**SFP Modules - Hot pluggable Transceivers**

P1MM	Multi-Mode SFP Module for distances up to 550m
P1SM10	Single-Mode SFP Module for distances up to 10km
P1AB2K	Single Strand SFP Module for distances up to 2km
P1GCE	Copper SFP Module for distances up to 100m



DCL2

DCL2 - DIN Rail Mounting Clip

Allows for easy installation of Altronix adapters utilizing screw mounting holes to mount on a standard DIN rail (Altronix Din Rail models D10, D12, D19, or D24).

Lifetime Warranty